


INSTALLATION INSTRUCTIONS

AUXILIARY HEAT SINK Part No. 9861

Use with Multi-Drive™, KBIC, KBMM and KBPB distributor models to extend maximum horsepower ratings as follows:

Models Covered		Maximum Horsepower Ratings (HP (KW))	
		Without Auxiliary Heat Sink	With Auxiliary Heat Sink
KBMC-240D* (Multi-Drive™)	Set for 115 VAC	3/4 (.5)	1 (.75)
	Set for 230 VAC	1½ (1)	2 (1.5)
KBIC-120		1/2 (.37)	1 (.75)
KBIC-240		1 (.75)	2 (1.5)
KBIC-240DS		1/2 (.37)	1 (.75)
KBPB-125 / KBIC-125 / KBMM-125		3/4 (.5)	1½ (1)
KBPB-125 / KBIC-225 / KBMM-225		1½ (1)	3 (2.2)

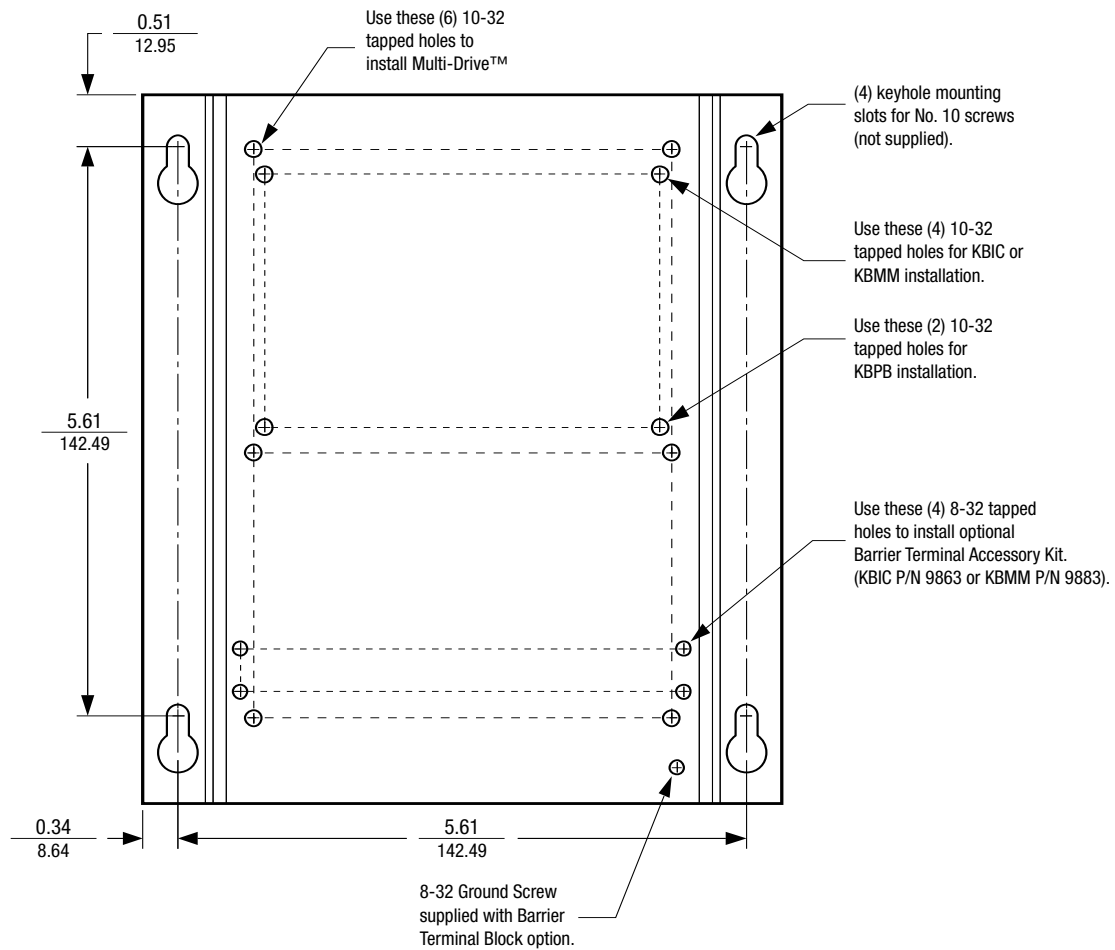

Notes:

1. Always mount heat sink in vertical position (if possible) to achieve maximum efficiency.
2. (6) 10-32 screws are provided.
3. Install with keyhole slots in position as shown.

*Multi-Drive™ model KBMD-240D contains a dual voltage switch which must be set to the proper AC line input voltage (115 or 230).



KB ELECTRONICS, INC.

12095 NW 39th Street, Coral Springs, FL 33065-2516 • (954) 346-4900 • Fax (954) 346-3377

Outside Florida Call **Toll Free** (800) 221-6570 • **E-mail** – info@kbelectronics.com

www.kbelectronics.com

(A40029) – Rev. C – 9/2003